

SINGLE / THREE PHASE LOADS

Resistive - Inductive - Capacitive

Mod.7020-10i 5KVA - Variable with 10 step

Mod.7020-20i 5KVA - Variable with 20 step

Mod.7020-10R/i
Mod.7020-10L/i
Mod.7020-10C/i

Mod.7020-20R/i
Mod.7020-20L/i
Mod.7020-20C/i

**Resistive, Inductive,
Capacitive Loads 5000VA.**

Variable with 10 or 20 uniform steps.

Provided with silk screened front panel and with 4mm CE safety sockets.

Robust metallic base with rubber feet.

For R models the evacuation of heat is obtained thanks to an electric fan.

Single-phase :

up to 240V 50/60Hz

Three-phase:

up to 240/415V (D/Y) 50Hz

Other power available:

from 0,3 (Mod.3020) up to

20kVA (Mod.20020)

Dimensions

-TTop (uo to 3kVA)

LxWxH: 70x40x40h cm.

-Wheeled

- LxWxH: 60x45x80h cm

English operation manual

French operation manual



MOD.7020-10R Resistive Load module, variable with 10 step

MOD.7020-10L Inductive Load module, variable with 10 step

MOD.7020-10C Capacitive Load module, variable with 10 step

For balanced or unbalanced 3-phase loads (star and delta) and single-phase loads. Each phase can be independently varied with 7 uniform steps up to max current value for full power. Single-phase connection provides 21 regulation steps.

MOD.7020-10Ri - MOD.7020-10Li - MOD.7020-10Ci

With an additional 3-Phase instrument that includes Voltmeters, Amperometers, Cosfimeters, wattmeters, varmeters, frequency meters, energy counters, with all values for each phase.

MOD.7020-20R Resistive Load module, variable with 20 step


MOD.7020-20L Inductive Load module, variable with 20 step

MOD.7020-20C Capacitive Load module, variable with 20 step

For balanced or unbalanced 3-phase loads (star and delta) and single-phase loads. Each phase can be independently changed in 10 uniform steps up to max current value of full load. Single-phase connection provides 30 regulation steps.

MOD.7020-20Ri - MOD.7020-20Li - MOD.7020-20Ci

With an additional 3-Phase instrument that includes Voltmeters, Amperometers, Cosfimeters, wattmeters, varmeters, frequency meters, energy counters, with all values for each phase.

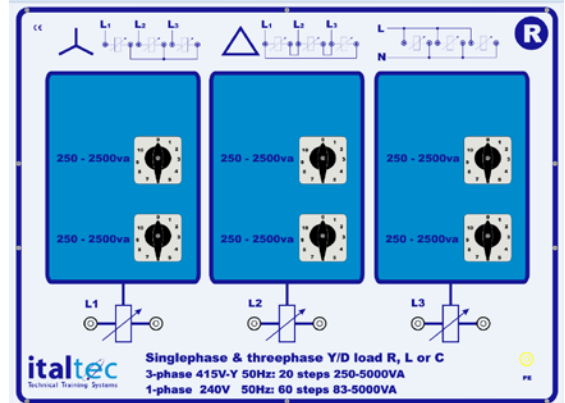

Regulation step (3-phase)

MOD.7020-10RLC

MOD.7020-20RLC

Step	Ω	VA	Amp.	Perc.	Step	Ω	VA	Amp.	Perc.
1	317	500	0,72	10%	1	635	250	0,36	5%
2	159	1000	1,45	20%	2	317	500	0,72	10%
3	106	1500	2,17	30%	3	211	750	1,08	15%
4	79,3	2000	2,90	40%	4	159	1000	1,45	20%
5	63,5	2500	3,62	50%
6	52,9	3001	4,35	60%	16	39,6	4000	5,80	80%
7	45,3	3500	5,07	70%	17	37,3	4250	6,16	85%
8	39,7	4000	5,80	80%	18	35,2	4500	6,52	90%
9	35,3	4500	6,52	90%	19	33,4	4750	6,92	95%
10	31,7	5000	7,25	100%	20	31,7	5000	7,25	100%

Robust sheet metal steel painted in the oven, mounted on four robust swivel wheels for easy movement.

italtec Technical Training Systems S.r.L.

20129 – MILANO – ITALIA – Viale Regina Giovanna, 35

Tel. +39 02 90 721 606 – Fax. +39 02 90 720 227

e-mail: italtec@italtec.it www.italtec.it