

SINGLE / THREE PHASE LOADS

Resistive - Inductive - Capacitive

Mod.3520 - 0,5KVA - Variable with 7 step

Mod.3520-10 - 0,5KVA - Variable with 10 step

Mod.3520-R
Mod.3520-L
Mod.3520-C

Mod.3520-10R
Mod.3520-10L
Mod.3520-10C

**Resistive, Inductive,
Capacitive Loads.**

Variable with 7 or 10 uniform steps.

Provided with silk screened front panel and with 4mm CE safety sockets.

Robust metallic base with rubber feet.

For R models the evacuation of heat is obtained thanks to an electric fan.

Single-phase :
up to **240V 50/60Hz**
Three-phase:
up to **240/415V (D/Y) 50Hz**

Other power available:
from **0,3 (Mod.3020) up to 20kVA (Mod.20020)**


Dimensions

-TTop

LxWxH: 50x40x40h cm.

English operation manual

French operation manual


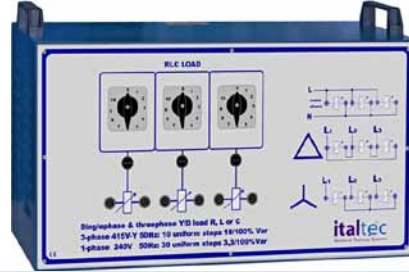


MOD.3520-R Resistive Load module, Variable with 7 step
MOD.3520-L Inductive Load module, Variable with 7 step
MOD.3520-C Capacitive Load module, Variable with 7 step

For balanced or unbalanced 3-phase loads (star and delta) and single-phase loads. Each phase can be independently varied with 7 uniform steps up to max current value for full power. Single-phase connection provides 21 regulation steps.

MOD.3520-10R Resistive Load module, variable with 10 step
MOD.3520-10L Inductive Load module, variable with 10 step
MOD.3520-10C Capacitive Load module, variable with 10 step

For balanced or unbalanced 3-phase loads (star and delta) and single-phase loads. Each phase can be independently changed in 10 uniform steps up to max current value of full load. Single-phase connection provides 30 regulation steps.

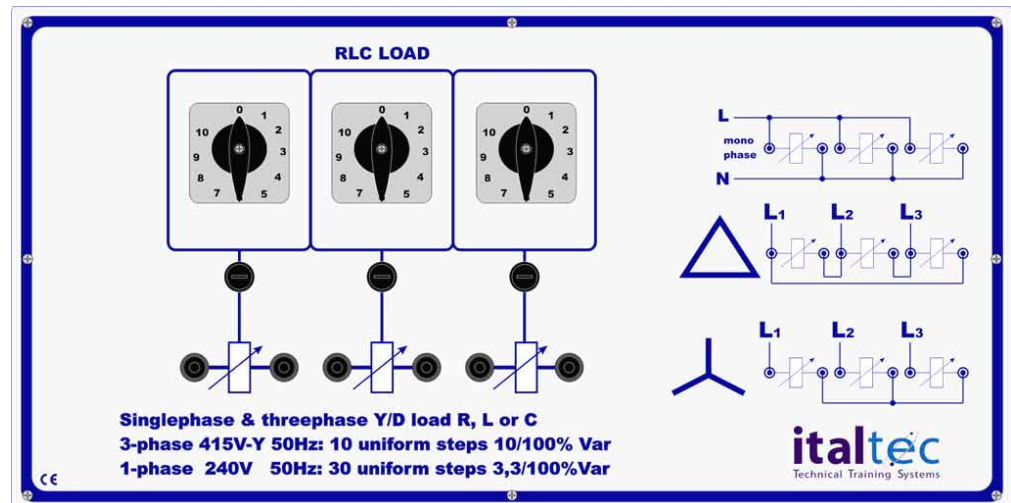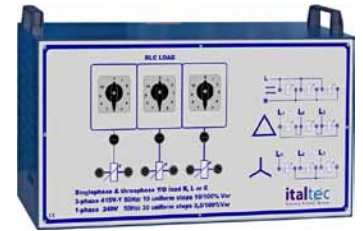

Regulation step for each-phase **MOD.3520-RLC**

Step	VA	Amp.	Perc.
1	27	0,11	15%
2	54	0,23	30%
3	81	0,34	45%
4	109	0,45	60%
5	136	0,57	75%
6	163	0,68	90%
7	190	0,79	105%

MOD.3520-10RLC

Step	VA	Amp.	Perc.
1	18	0,08	10%
2	36	0,15	20%
3	54	0,23	30%
4	72	0,30	40%
5	90	0,38	50%
6	108	0,45	60%
7	126	0,53	70%
8	144	0,60	80%
9	162	0,68	90%
10	180	0,75	100%

Power variation (240V):

Mod.3520-RLC

1phase: 5% ÷ 105% -27÷570VA

3phase: 15% ÷ 105% -80÷570VA

Power variation (240V):

Mod.3520-10RLC

1phase: 3,3% ÷ 100% -18÷540VA

3phase: 10% ÷ 100% -54÷540VA